


Premium hose  
EC230

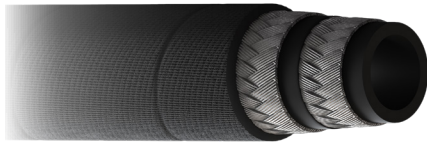

# EC230

Premium large bore  
two wire braided hose

Exceeds: SAE 100R2

by Danfoss	<b>EC230-40</b>	63.5 mm (2.50 in) DN60	<b>Dura-Tuff</b>	Exceeds SAE 100R2 Performance MSHA IC-84/19	<b>79 BAR (1150 PSI)</b>	-40°C to +100°C -40°F to +212°F	
------------	-----------------	---------------------------	------------------	--	--------------------------	------------------------------------	--

**Typical application:**

Hydraulic system service with petroleum and waterbased fluids, for general industrial service

<b>Agency specifications:</b>	MSHA		
<b>Hose construction:</b>	<b>Inner tube:</b> Nitrile	<b>Reinforcement:</b> Two wire briad	<b>Cover:</b> Dura-Tuff premium abrasion
<b>Operating temperature:</b>	-40°C to +100°C (-40°F to +212°F)		
<b>Qualified fittings:</b>	For fitting information, see your Danfoss representative.		

PART #	SIZE DIMENSIONS				PRESSURE				BEND		WEIGHT	
	Hose I.D.		Hose O.D. (nominal)		Working Pressure		Min. Burst Pressure		Min. Bend Radius		Weight	
	mm	in	mm	in	bar	psi	bar	psi	mm	in	kg/m	lbs/ft
<b>EC230-40</b>	63,5	2.50	78,6	3.09	79,0	1,150	316,0	4,600	660,0	26.00	3,88	2.61