
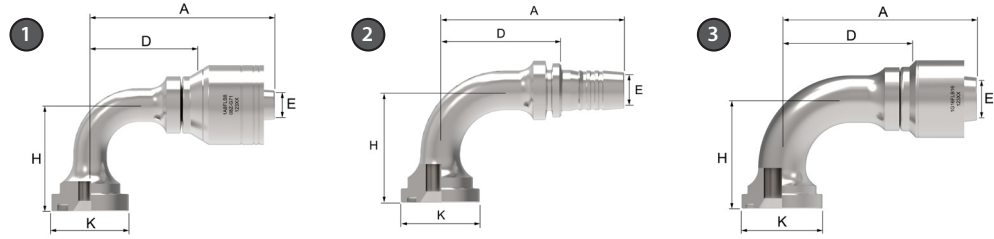


**Braided series**


# FLB

SAE code 61 split flange 90° elbow

PART			HOSE SIZE INFO		DIMENSIONS							
1	2	3	Thd. Flange head Dia. K Ø	Hose size	A		D		EØ		H	
1A part #	Nipple part #	OTC part #			mm	in	mm	in	mm	in	mm	in
<b>1A8FLB8</b>	<b>1S8FLB8</b>	<b>1G8FLB8</b>	1.19	08	72,6	2.86	42,3	1.69	9,4	0.37	41,4	1.63
<b>1A12FLB8</b>	<b>1S12FLB8</b>	<b>1G12FLB8</b>	1.50	08	87,6	3.45	57,9	2.28	9,4	0.37	54,1	2.13
<b>1A12FLB10</b>	<b>1S12FLB10</b>	<b>1G12FLB10</b>	1.50	10	87,4	3.44	58,2	2.29	12,7	0.50	54,1	2.13
<b>1A12FLB12</b>	<b>1S12FLB12</b>	<b>1G12FLB12</b>	1.50	12	88,6	3.49	58,4	2.30	14,7	0.58	54,1	2.13
<b>1A16FLB12</b>	<b>1S16FLB12</b>	<b>1G16FLB12</b>	1.75	12	102,4	4.03	72,1	2.84	15,5	0.61	60,3	2.38
<b>1A20FLB12</b>	<b>1S20FLB12</b>	—	2.00	12	118,6	4.67	88,4	3.48	14,7	0.58	66,5	2.62
<b>1A12FLB16</b>	<b>1S12FLB16</b>	<b>1G12FLB16</b>	1.50	16	106,7	4.20	72,4	2.85	19,3	0.76	55,1	2.17
<b>1A16FLB16</b>	<b>1S16FLB16</b>	<b>1G16FLB16</b>	1.75	16	107,2	4.22	72,6	2.86	19,3	0.76	60,5	2.38
<b>1A20FLB16</b>	<b>1S20FLB16</b>	<b>1G20FLB16</b>	2.00	16	123,2	4.85	89,0	3.50	19,3	0.76	66,5	2.62
<b>1A24FLB16</b>	<b>1S24FLB16</b>	<b>1G24FLB16</b>	2.37	16	142,0	5.59	107,7	4.24	19,3	0.76	79,2	3.12
<b>1A16FLB20</b>	<b>1S16FLB20</b>	<b>1G16FLB20</b>	1.75	20	118,4	4.66	74,4	2.93	19,3	0.76	60,5	2.38
<b>1A20FLB20</b>	<b>1S20FLB20</b>	<b>1G20FLB20</b>	2.00	20	134,6	5.30	90,7	3.57	25,7	1.01	66,5	2.62
—	<b>1S24FLB20</b>	<b>1G24FLB20</b>	2.37	20	153,4	6.04	109,5	4.31	25,7	1.01	79,2	3.12

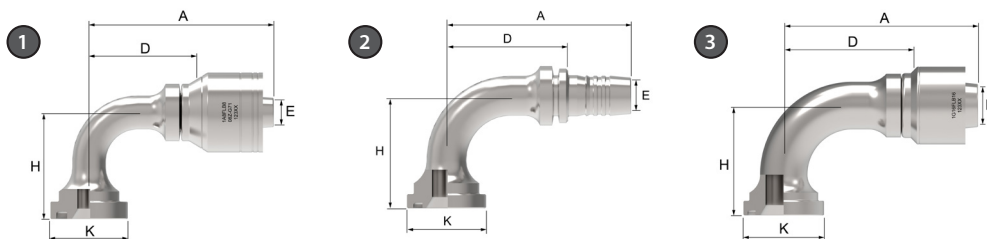

# FLB

SAE code 61 split flange 90° elbow (cont.)

PART			HOSE SIZE INFO		DIMENSIONS							
1	2	3	Thd. Flange head Dia. K Ø	Hose size	A		D		EØ		H	
1A part #	Nipple part #	OTC part #			mm	in	mm	in	mm	in	mm	in
<b>1A24FLB20</b>	—	—	2.37	-20	153,4	6.04	109,5	4.31	25,7	1.01	79,2	3.12
—	<b>1S32FLB20</b>	<b>1G32FLB20</b>	2.81	-20	108,0	4.25	64,0	2.52	25,7	1.01	65,0	2.56
<b>1A16FLB24</b>	<b>1S16FLB24</b>	<b>1G16FLB24</b>	1.75	-24	121,9	4.80	75,4	2.97	19,3	0.76	60,5	2.38
<b>1A20FLB24</b>	<b>1S20FLB24</b>	<b>1G20FLB24</b>	2.00	-24	137,9	5.43	91,7	3.61	25,7	1.01	66,5	2.62
<b>1A24FLB24</b>	<b>1S24FLB24</b>	<b>1G24FLB24</b>	2.37	-24	157,0	6.18	110,5	4.35	32,0	1.26	79,2	3.12
<b>1A32FLB24</b>	<b>1S32FLB24</b>	<b>1G32FLB24</b>	2.81	-24	184,9	7.28	138,4	5.45	32,0	1.26	114,3	4.50
<b>1A24FLB32</b>	<b>1S24FLB32</b>	—	2.37	-32	161,8	6.37	111,8	4.40	32,0	1.26	79,2	3.12
<b>1A32FLB32</b>	<b>1S32FLB32</b>	<b>1G32FLB32</b>	2.81	-32	189,7	7.47	139,4	5.49	44,5	1.75	114,3	4.50
<b>1A40FLB32</b>	<b>1S40FLB32</b>	<b>1G40FLB32</b>	3.31	-32	189,7	7.47	139,4	5.49	44,5	1.75	115,8	4.56

For flanges, split flange halves, kits and o-rings, see pages 241-247.