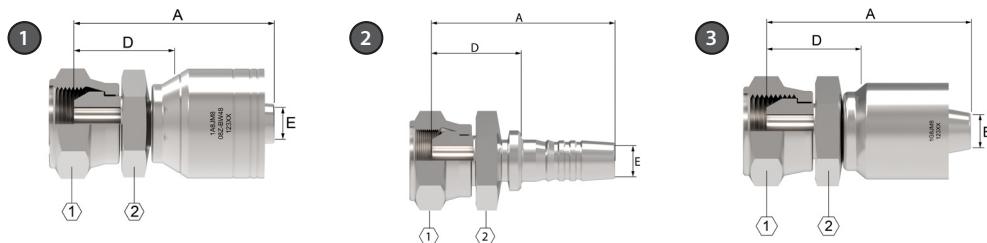


## Braided series


**JM**

JIS/BSPP female swivel†

PART			HOSE SIZE INFO		DIMENSIONS									
① 1A part #	② Nipple part #	③ OTC part #	Thd.	Hose size	A		D		EØ		①		②	
					mm	in	mm	in	mm	in	mm	in	mm	in
<b>1A4JM4</b>	<b>1S4JM4</b>	<b>1G4JM4</b>	G 1/4	-04	47,0	1.85	23,6	0.93	4,2	0.16	19,0	0.75	19,0	0.75
<b>1A6JM6</b>	<b>1S6JM6</b>	<b>1G6JM6</b>	G 3/8	-06	51,0	2.01	25,7	1.01	6,7	0.26	22,0	0.87	22,0	0.87
<b>1A8JM8</b>	<b>1S8JM8</b>	<b>1G8JM8</b>	G 1/2	-08	58,0	2.28	28,3	1.11	9,6	0.38	27,0	1.06	27,0	1.06
<b>1A12JM12</b>	<b>1S12JM12</b>	<b>1G12JM12</b>	G 3/4	-12	62,0	2.44	31,8	1.25	15,5	0.61	32,0	1.26	36,0	1.42
<b>1A16JM16</b>	<b>1S16JM16</b>	<b>1G16JM16</b>	G 1	-16	69,0	2.72	34,6	1.36	20,7	0.81	41,0	1.61	41,0	1.61
<b>1A20JM20</b>	<b>1S20JM20</b>	<b>1G20JM20</b>	G 1 1/4	-20	80,2	3.16	36,2	1.42	26,6	1.05	50,0	1.97	46,0	1.81

†The JIS parallel thread and the BSPP connection are interchangeable. G as part of thread size is ISO Designation for parallel thread.