


# “Marine Hose”

## MH™ Series PVC Suction Hose

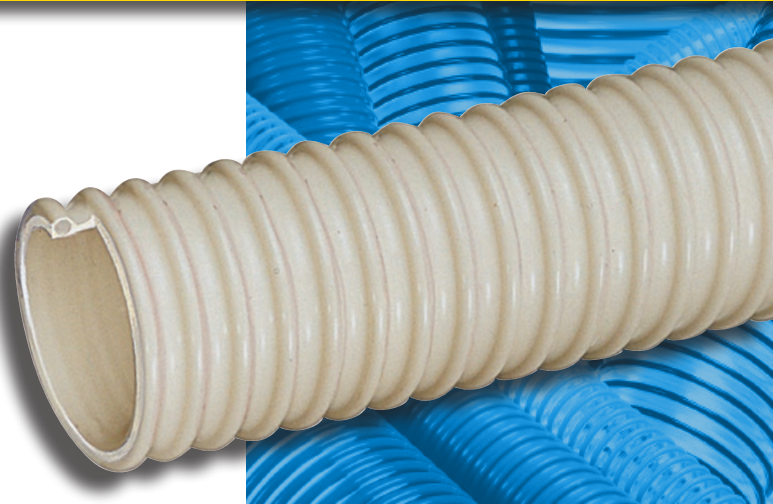

### General Applications:

- Drain lines
- Marine bilge discharge
- Marine plumbing
- Recreational vehicle (RV) plumbing


**Construction:** PVC tube with rigid PVC helix.

**Service Temperature Range:**  
-4°F (-20°C) to +150°F (+65°C)\*



### Features and Advantages:

- **Odor-resistant Tube** – Special additives help eliminate the build-up of unwanted odors.
- **Convolutd Outer Cover** – Provides increased hose flexibility.
- **Easy Installation** – Ideal for working in confined areas. Permits installers to make smooth, tight turns. Requires fewer fittings than rigid pipe.
- **Phthalate Free**



**Part No. A2150L1**  
**Custom Molded Cuff** — 1½" Molded cuff (shown above) is designed for use with Tigerflex® Series MH150 marine hose.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
MH100	1	25.4	1.22	31.0	45	15	Full	24	1	100	0.15
MH125	1-1/4	32.0	1.49	38.0	40	12	Full	24	1.5	100	0.20
MH150	1-1/2	38.1	1.77	45.0	40	12	Full	24	2	100	0.25
MH200	2	50.8	2.32	59.0	35	10	26	20	2.5	100	0.31

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.  
**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.  
 \*Actual service temperature range is application dependent.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.