

Non-Conductive High Oil-Resistant General Service Hose

General Applications:

- Diesel
- Fuel oil
- Oil
- Other petroleum products
- * Also suitable for handling regular and unleaded gasolines up to 93 octane and bio-diesels up to B20.

Construction:

- **Cover** – Red Nitrile/PVC, RMA Class A oil resistant.
- **Reinforcement** – Spiral polyester yarn.
- **Tube** – Black Nitrile, RMA Class A oil resistant.

Service Temperature Range

- 20°F (-29°C) to +180°F (+82°C)

Features and Advantages:

- Long lengths on reels.
- High oil resistance (Class A) rated tube and cover.
- Non-Conductive - tested to exceed minimum electrical resistance greater than one (1) MEGOHM per inch of hose length at 1000 volts DC.

Branding:


REDI-MAX HIGH OIL RESIST. NON-CONDUCTIVE-SIZE-WP-MADE IN USA

Packaging:

Maximum 2 pcs. on reel.

* Cut lengths of 50 or 100 feet available.

Note: For Quick Disconnect Couplings and Worm Gear Clamps refer to pages 15, 18-19 of this catalog.

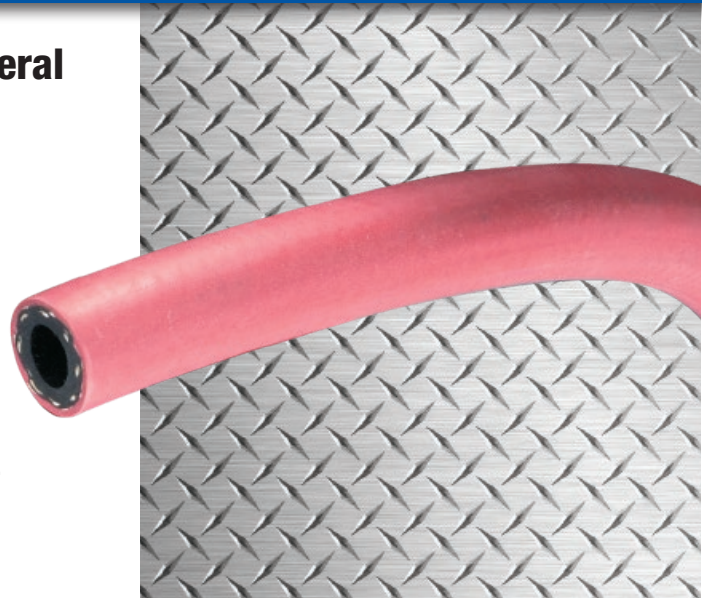

Nominal Specifications

Part Number	Color	ID (in)	OD (in)	Working Pressure (psi)	Reel Length (ft)	Weight (lbs/pc)
REDIMAX-025x700	Red	1/4	0.62	300	700	112
REDIMAX-038x700	Red	3/8	0.69	300	700	126
REDIMAX-050x700	Red	1/2	0.84	300	700	175
REDIMAX-075x700	Red	3/4	1.15	300	700	294
REDIMAX-100x700	Red	1	1.43	300	700	441
REDIMAX-125x500	Red	1 1/4	1.78	250	500	405
REDIMAX-150x400	Red	1 1/2	2.03	250	400	380

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.