

TS Series Heavy Duty PVC Water Discharge Hose

General Applications:


- Agriculture
- Construction
- Industrial
- Quarry

Construction:

Spiral homogeneous PVC construction is ideal for agriculture and construction applications, and provides for minimal elongation.

Service Temperature Range:

-5°F (-20°C) to +170°F (+76°C)

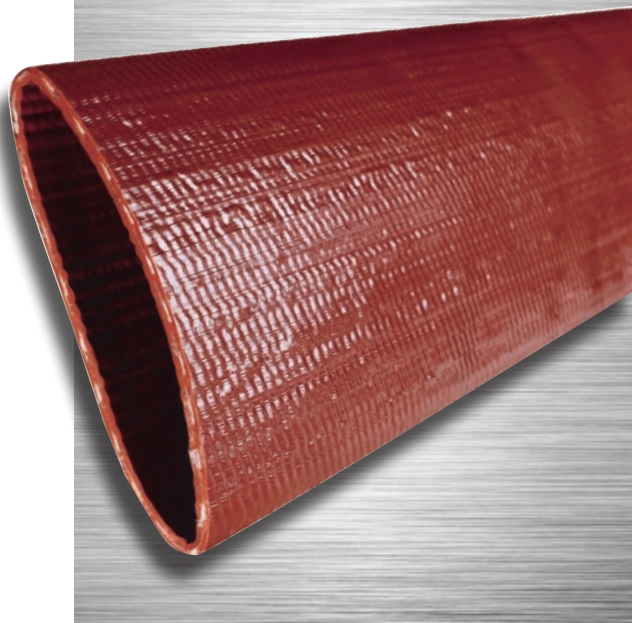

Features and Advantages:

- **Durable PVC Material** – Provides good abrasion, chemical and UV resistance.
- **Heavy Duty Construction** – Designed for applications requiring higher working pressures.
- **Smooth PVC Tube** – Provides low friction loss.
- **PVC Cores** – Hoses coiled around durable PVC cores providing for easy unwinding.
- **Compact Design** – Flat hose design rolls up into tight coils for easy storage and transport, takes up less space than other hoses.

Nominal Specifications

Series Number	Size		Hose ID		Wall Thickness (in)	Working Pressure (psi) at 68°F	Burst Pressure (psi) at 68°F	Coil Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)					
TS150	1 1/2	38.1	1.610	40.9	0.068	145	435	300	0.20
TS200	2	50.8	2.090	53.1	0.072	145	435	300	0.27
TS300	3	76.2	3.090	78.5	0.095	145	435	300	0.50
TS400	4	101.6	4.100	104.1	0.100	120	360	300	0.67
TS600	6	152.4	6.160	156.5	0.115	115	345	300	1.15
TS800	8	203.2	8.150	207.0	0.120	70	210	300	1.55

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.