


Spiral – 4S and 6S series

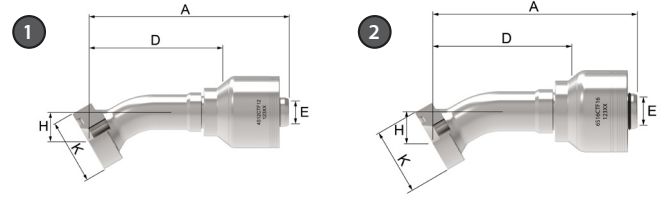

CTF

CAT Flange (30° elbow)

| PART | HOSE SIZE INFO | | | DIMENSIONS | | | | | | | | | |
|--------------------|------------------------|----|-----------|----------------------|------|-------|-------|-------|------|------|------|------|------|
| | Terminal End Hose Size | DN | Hose size | Flange Head Dia. K Ø | | A | | D | | EØ | | H | |
| 1 4S part # | | | | mm | in | mm | in | mm | in | mm | in | mm | in |
| 4S12CTF12 | -12 | 19 | -12 | 41,3 | 1.63 | 124,2 | 4.89 | 88,0 | 3.46 | 14,2 | 0.56 | 19,1 | 0.75 |
| 4S16CTF16 | -16 | 25 | -16 | 47,6 | 1.87 | 141,7 | 5.58 | 102,0 | 4.02 | 19,2 | 0.76 | 21,6 | 0.85 |
| 4S20CTF16 | -20 | 25 | -16 | 54,0 | 2.13 | 161,7 | 6.37 | 122,0 | 4.80 | 19,2 | 0.76 | 25,3 | 1.00 |
| 4S20CTF20** | -20 | 31 | -20 | 54,0 | 2.13 | 179,1 | 7.05 | 123,1 | 4.85 | 25,2 | 0.99 | 25,3 | 1.00 |
| 4S24CTF20** | -24 | 31 | -20 | 63,5 | 2.50 | 194,9 | 7.67 | 138,9 | 5.47 | 25,2 | 0.99 | 27,7 | 1.09 |
| 4S24CTF24 | -24 | 38 | -24 | 63,5 | 2.50 | 224,8 | 8.85 | 146,8 | 5.78 | 31,1 | 1.22 | 27,7 | 1.09 |
| 4S32CTF32 | -32 | 51 | -32 | 79,4 | 3.13 | 267,3 | 10.52 | 189,2 | 7.45 | 42,1 | 1.66 | 34,8 | 1.37 |
| 2 6S part # | Terminal End Hose Size | DN | Hose size | Flange Head Dia. K Ø | | A | | D | | EØ | | H | |
| 6S16CTF16 | -16 | 25 | -16 | 47,6 | 1.87 | 141,7 | 5.58 | 102,0 | 4.02 | 19,2 | 0.76 | 21,6 | 0.85 |
| 6S20CTF16 | -20 | 25 | -16 | 54,0 | 2.13 | 161,7 | 6.37 | 122,0 | 4.80 | 19,2 | 0.76 | 25,3 | 1.00 |
| 6S20CTF20 | -20 | 31 | -20 | 54,0 | 2.13 | 179,1 | 7.05 | 123,1 | 4.85 | 25,2 | 0.99 | 25,3 | 1.00 |
| 6S24CTF20 | -24 | 31 | -20 | 63,5 | 2.50 | 194,9 | 7.67 | 138,9 | 5.47 | 25,2 | 0.99 | 27,7 | 1.09 |
| 6S24CTF24 | -24 | 38 | -24 | 63,5 | 2.50 | 224,8 | 8.85 | 146,8 | 5.78 | 31,1 | 1.22 | 27,7 | 1.09 |
| 6S32CTF24 | -32 | 38 | -24 | 79,4 | 3.13 | 264,3 | 10.41 | 186,3 | 7.34 | 31,1 | 1.22 | 34,8 | 1.37 |
| 6S32CTF32 | -32 | 51 | -32 | 79,4 | 3.13 | 267,3 | 10.52 | 189,2 | 7.45 | 42,1 | 1.66 | 34,8 | 1.37 |