



Twin Weld Plate for 2 Clamp Bodies Type DSP

A



STAUFF Group 1

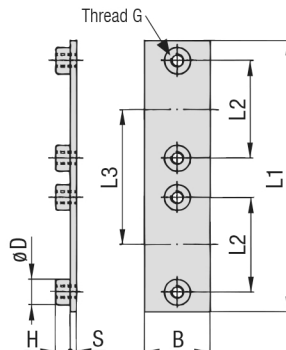

STAUFF Group 1A to 8



| Group STAUFF | DIN | Dimensions (mm/in) | | | | | | | | Ordering Codes (Standard Options) |
|-----------------|-----|--------------------|------|------|------|------|-----|-----|-----|--------------------------------------|
| | | Thread G | L1 | L2 | L3 | B | S | H | ØD | |
| 1 | 0 | M6 | 87 | 40 | 40 | 30 | 3 | 6.5 | 12 | DSP-1-40-M-W2 |
| | | 1/4-20 UNC | 3.43 | 1.57 | 1.57 | 1.18 | .12 | .26 | .47 | DSP-1-40-U-W2 |
| 1A | 1 | M6 | 77 | 20 | 37 | 30 | 3 | 6.5 | 12 | DSP-1A-37-M-W2 |
| | | 1/4-20 UNC | 3.03 | .79 | 1.46 | 1.18 | .12 | .26 | .47 | DSP-1A-37-U-W2 |
| 2 | 2 | M6 | 86 | 26 | 44 | 30 | 3 | 6.5 | 12 | DSP-2-44-M-W2 |
| | | 1/4-20 UNC | 3.39 | 1.02 | 1.73 | 1.18 | .12 | .26 | .47 | DSP-2-44-U-W2 |
| 3 | 3 | M6 | 102 | 33 | 52 | 30 | 3 | 6.5 | 12 | DSP-3-52-M-W2 |
| | | 1/4-20 UNC | 4.02 | 1.30 | 2.05 | 1.18 | .12 | .26 | .47 | DSP-3-52-U-W2 |
| 4 | 4 | M6 | 120 | 40 | 60 | 30 | 3 | 6.5 | 12 | DSP-4-60-M-W2 |
| | | 1/4-20 UNC | 4.72 | 1.57 | 2.36 | 1.18 | .12 | .26 | .47 | DSP-4-60-U-W2 |
| 5 | 5 | M6 | 145 | 52 | 75 | 30 | 3 | 6.5 | 12 | DSP-5-75-M-W2 |
| | | 1/4-20 UNC | 5.71 | 2.05 | 2.95 | 1.18 | .12 | .26 | .47 | DSP-5-75-U-W2 |
| 6 | 6 | M6 | 178 | 66 | 90 | 30 | 3 | 6.5 | 12 | DSP-6-90-M-W2 |
| | | 1/4-20 UNC | 7.01 | 2.60 | 3.54 | 1.18 | .12 | .26 | .47 | DSP-6-90-U-W2 |

All threaded parts are available with Metric ISO thread or unified coarse (UNC) thread according to dimension table.
Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.

Ordering Codes

Weld Plate *DSP-*1-*40-*M-*W2

| | | |
|--------------------------------------|-------------------------------------|------------|
| * Twin Weld Plate for 2 Clamp Bodies | | DSP |
| * STAUFF Group | | 1 |
| * Pipe center spacing L3 (mm) | | 40 |
| * Thread code | Metric ISO thread | M |
| | Unified coarse (UNC) thread | U |
| * Material code | Carbon Steel, phosphated | W2 |
| | Carbon Steel, zinc/nickel-plated | W3 |
| | Stainless Steel V2A | W4 |
| | 1.4301 / 1.4305 (AISI 304 / 303) | |
| | Stainless Steel V4A | W5 |
| | 1.4401 / 1.4571 (AISI 316 / 316 Ti) | |